



Features

- Allows future extensibility with 3 sensor connectors
- Buffers data from sensors for transfer to cloud in case of connection loss
- Remote update of sensor and gateway SW to maximize up-to-date secure operation
- Enables remote sensor and gateway management and monitoring with remote monitoring service
- Integrated SIM card and ready-made data plan
- Low-power operation with multiple powering options
- Tested to endure extreme weather conditions

Vaisala Beacon Edge Gateway EGW501 is a data collection and transfer solution that provides platform-level security for Vaisala Beacon Station BWS500 and other systems. The integrated radio module and SIM card, together with the compact design, allow for speedy installation and commissioning.

Connection point for sensors

EGW501 has 3 dedicated connectors for sensor-to-gateway communication, a power connector, and a connector for local maintenance connection. The connected sensor is the multiparameter Vaisala Weather Transmitter WXT536.

Data buffering and transfer

EGW501 handles data transfer between the sensors and a Vaisala cloud. Additionally, it provides data collection and storage. EGW501 buffers the observation data for transmission at regular intervals. The local buffering capacity ensures that no data is lost and there are no communication breaks.

Remote update and diagnostics

Because of the internet connectivity, the gateway firmware can be updated remotely. With the remote device management and monitoring service, the need for site visits decreases.

Remote operations are supported with diagnostics to ensure speedy recovery from error situations.

Local management

In normal use, site visits are rare. When a need for a site visit arises, for example a direct connection to EGW501 is needed, a local connection is simple to establish. Simply connect your laptop to EGW501 using a USB-C cable and access the provided web UI tool.

Cellular data service subscription

EGW501 operates as a secure gateway between the weather station and the outside world.

It is plug and play out of the box. Using the integrated radio and SIM card, the data is transferred over a cellular connection. The cellular data plan is available for a range of countries.

Technical data

Operating environment

Operating temperature	-40 ... +55 °C (-40 ... +131 °F)
Storage temperature	-40 ... +70 °C (-40 ... +158 °F)

Powering

Operating voltage	9 - 32 VDC
Current consumption, maximum	2 A
Mating connectors (power input)	M12 female A-coded 4-pin connector

Processing system

Processor	ARM Cortex A9
Memory	1 GB DDR3L RAM, 8 GB eMMC Flash
Operating system	Linux
Communications protocol	IPv4 and IPv6

Radio module

Acceptance	CE (Europe), FCC (USA), IC (Canada) <ul style="list-style-type: none"> FCC ID: 2A039-EGW501 ICED ID: 23830-EGW501
------------	---

SIM card type	Mini-SIM
---------------	----------

Frequency bands

LTE-FDD	B1/ B2/ B3/ B4/ B5/ B7/ B8/ B12/ B13/ B18/ B19/ B20/ B25/ B26/ B28
LTE-TDD	B38/ B39/ B40/ B41
WCDMA	B1/ B2/ B4/ B5/ B6/ B8/ B19
GSM	B2/ B3/ B5/ B8

Mechanical specifications

Weight	1 kg (2.2 lb)
Package dimensions (L × W × H)	306 × 184 × 156 mm (12.05 × 7.24 × 6.14 in)
IP rating	IP67
Material, enclosure	Polycarbonate (PC)
Material, connectors	Nickel-plated brass

Mounting options and accessories

Mast mounting kit for pole masts Ø 60 ... 200 mm (2.36 ... 7.87 in), includes mounting brackets, steel band, accessories, and 5-mm Allen key ASM213841

Tripod mounting kit, includes mounting brackets and accessories ASM213954

Wall mounting kit, includes mounting plate, screws, and wall plugs ASM213843

USB-C maintenance cable ¹⁾ -

Cable, from gateway to WXT ²⁾ -

¹⁾ Delivered with each gateway.

²⁾ 2, 5, or 10-meter (6 ft 6 in, 16 ft 4 in, 32 ft 9 in) cable included.

Communication options


Wireless communication	4G LTE / 3G / 2G
Maintenance communication	USB 3.0 Web UI (locally)
Data interfaces	Lightweight machine-to-machine (LwM2M) interface

VAISALA

www.vaisala.com

Compliance

EU directives	EMC, LVD, RoHS, RED
Compliance marks	CE, UKCA, FCC, IC, RCM
EMC compatibility	IEC / EN / BS EN 61326-1, industrial environment CISPR 32 / EN 55032 / BS EN 55032, Class B EN 301489-1 FCC 15B ICES-3 (B)
Radio compatibility	EN 301 908-1 EN 301 511 FCC part 22, 24, 27, 90
Electrical safety	IEC 61010-1
Cold	IEC 60068-2-1
Dry heat	IEC 60068-2-2
Vibration	IEC 60068-2-6 IEC 60068-2-64
Change of temperature	IEC 60068-2-14
Damp heat, cyclic	IEC 60068-2-30
Rough handling	IEC 60068-2-31
Damp heat	IEC 60068-2-78

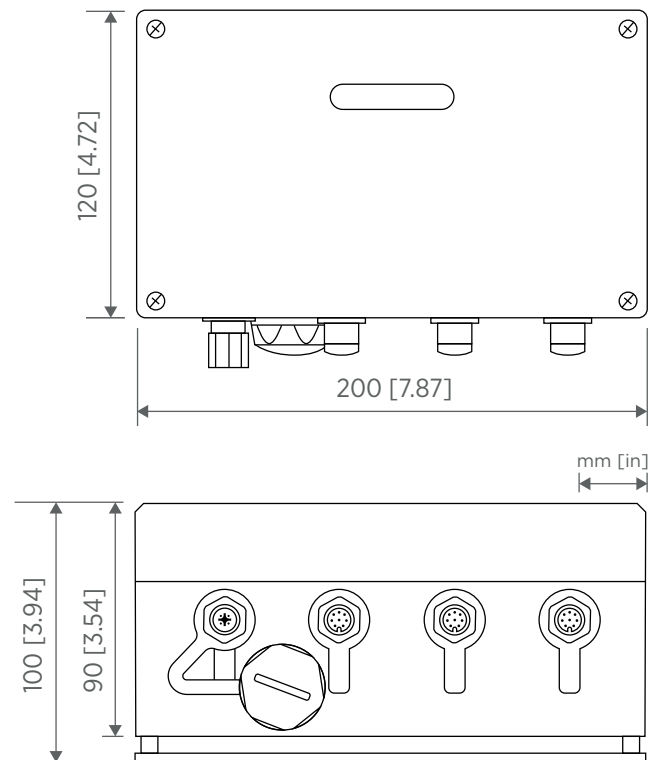

EGW501 dimensions and connectors

Published by Vaisala | B212121EN-A © Vaisala 2020

All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. Any reproduction, transfer, distribution or storage of information contained in this document is strictly prohibited. All specifications – technical included – are subject to change without notice.