



rt1

rooftop sensor



**Designed especially
for commercial rooftop
PV installations**



**Measures incoming
solar irradiance and
back panel temperature**



**Kipp & Zonen quality,
based on
100 years of experience**




PV panel temperature sensor

Did you know that it pays off to monitor the performance of your rooftop PV installation? When you know exactly what the incoming solar radiation is, and the panel temperature, you know if you're getting the most out of your installation. Due to the stability of the design, recalibration is not needed for 5 years.

Monitor the Return On Investment of your rooftop PV installation professionally with rt1.



rt1 rooftop PV monitoring made easy

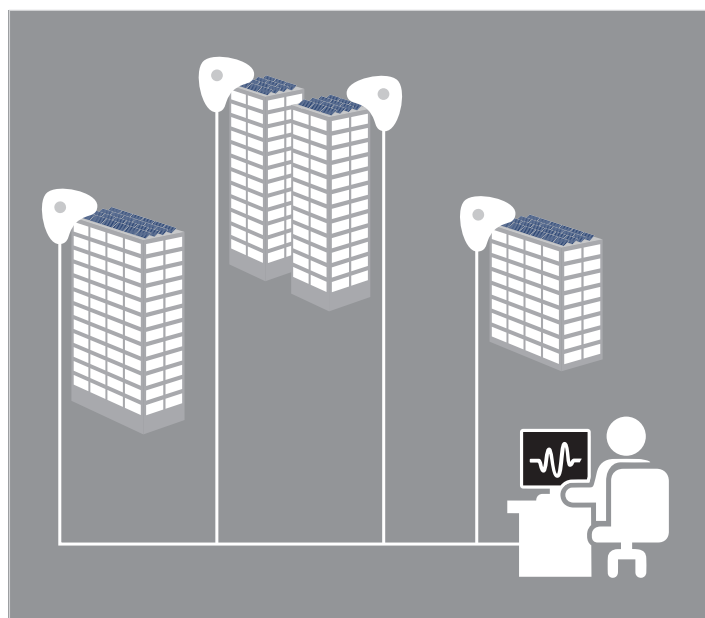

The **rt1** rooftop sensor:

- outperforms reference cells
- is very rugged, stable and reliable
- measures the real solar irradiance from dawn till dusk
- has a soiling resistant design, for low maintenance
- is extremely simple to mount on a corner of a PV panel
- can be easily removed for recalibration or service
- also fits on the side or top with a clamp-on adapter
- comes with a Kipp & Zonen calibration certificate



rt1 is a small, fully weatherproof duo-sensor that independently measures the incoming solar irradiance and the back panel temperature. Thanks to this included back panel temperature sensor you collect all the data you need to monitor the performance of your installation - all in digital Modbus® format. Thanks to the unique design you can easily fix it to your PV panel without the need for any tools.

“If you don’t measure accurately, you don’t know what you’re missing.”

Technical specifications

| | |
|---|---|
| Irradiance | 0 to 2000 W/m ² |
| Precision/resolution | 1 W/m ² |
| Spectral range | 400 to 1100 nm |
| Non-stability (change/year) | < 1 % |
| Non-linearity (0 to 1000 W/m ²) | < 1 % |
| PV panel temperature | -20 to +100 °C, ± 1 °C |
| Calibration | Against traceable reference pyranometer |
| Signal connections | 1 - RS-485 Modbus® to host 2 - PV panel temperature sensor |
| Voltage range | 5 to 30 VDC |
| Power consumption maximum | 60 mW |
| Ambient operating temperature | -40 to +80 °C |
| Recommended calibration interval | 5 years |
| Warranty after registration | 5 years |